

12 Channel Audio Amplifier


A1260/A1260R

The A1260 (and the A1260R rack-mountable version) provide installers with a high-quality 12 channel amplifier that is perfect for multi-zone distributed audio applications. Designed to complement the A4600 A/V Pre-Amplifier Matrix, this six-zone amplifier offers plenty of power, clean sound, and reliable performance to satisfy the most discerning audio and home theater enthusiasts.


Features:

- Each zone may be switched between the global input and the local input.
- Sources connected to Global input can be heard in all 6 zones.
- 110-120 or 220-240 operation.
- Each channel has independent turn-on sensors.
- Torroidal power transformer with 4 secondaries to maximize separation.
- Computer-grade components throughout to ensure long-life.
- High Current Circuitry.

A1260

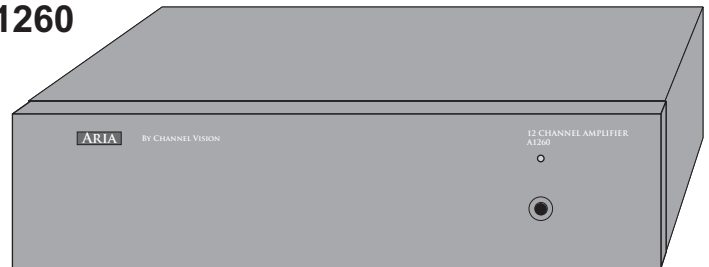

A1260R

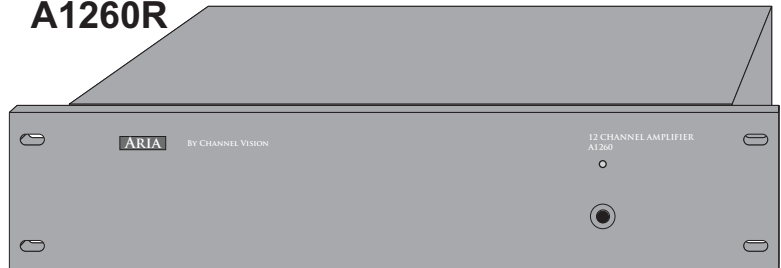

Specifications: (Typical @25 degrees C)

Output Frequency Range:	20-20kHz
Output Level:	60 W/ch 8ohms 60 W/ch 4 ohms (With 120VAC or AC 240VAC)
Turn on delay:	< 500msec
Turn off delay:	~ 30-100 seconds
THD:	< .1% @ 1kHz
Power Consumption:	< 35 W (no input)
Operating Temperature:	-10 degrees C to +60 degrees C
AC fuse:	10A Slo-blo 5x20mm



CHANNEL VISION™

234 FISCHER AVENUE • COSTA MESA, CA 92626
(714) 424-6500 • (800) 840-0288 • (714) 424-6510 fax
www.channelvision.com • email: sales@channelvision.com