

RCA 110-Type QuickPort Connector

APPLICATION

Leviton's RCA 110-Type QuickPort Connector is designed to locally distribute baseband audio/video signals over 10 to 40 feet of unshielded twisted pair cabling. Featuring standard IDC slots for quick and easy terminations, these connectors are compatible with a variety of QuickPort® wallplates and panels.

STANDARDS COMPLIANCE

Meets all applicable standards: UL Listed.

PHYSICAL SPECIFICATIONS

Materials: Snap-in connector bodies are high-impact, fire retardant plastic rated UL 94V-0.
Dimensions: RCA Connector: 0.636"H x .0578"W x 1.092"D

DESIGN CONSIDERATIONS

- RCA QuickPort connectors snap into any housing with the QuickPort name, including: flush and surface mount outlets, Multimedia Outlet System, patch panel, and patch blocks.
- Use separate cables for analog and digital signals.
- Use with Category 5 or better cabling.
- Check clearance behind proposed location of module, to ensure space for proper bend radius of cabling media.
- RCA connector inserts are available in orange (PCM Audio), red (Right Audio), white (Left Audio) and yellow (Video). The connector housing is available in ivory, white, almond, grey and black, to match housing or wallplates.

INSTALLATION NOTES

- Secure connectors to cable prior to snapping into faceplate or surface mount housing.
- Keep digital signal bundles separate from analog signal bundles.
- Connector supports connectivity for up to two pairs. Use both pairs to reduce wire losses in longer cable runs.

UNIQUE FEATURES

- Connectors fit all QuickPort® wallport housings, patch panels and patch blocks.
- Oversize connector diameter and depth readily accommodate larger "high-end" audio/video plugs (male).
- Gold-plated/wash connector for increased durability.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



WARRANTY INFORMATION

- One-year limited product warranty.

For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

Connectors shall snap into any housing with the QuickPort name, including: flush and surface mount outlets, Multimedia Outlet System, patch panels and patch blocks. Connector shall have oversized diameter and depth to accommodate larger, "high-end" audio/video male plugs. The connector housing shall be available in ivory, white, almond, grey and black. The insert shall be available in orange, red, white and yellow. Connectors shall be UL listed. All plastics used in construction of the module bodies shall be fire-retardant with a UL flammability rating of 94V-0. The manufacturer shall provide a one-year limited product warranty.

RCA 110-Type Connector




For Applications Engineering Support – Call 1-425-485-4288; in USA call 1-800-722-2082
Spec sheets and updates are also available at www.levitonvoicedata.com.

RCA 110-Type Connector

Part Numbers
40735-Rxx
.....

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
(.DXF, .DWG, MS-DOS.EPS)

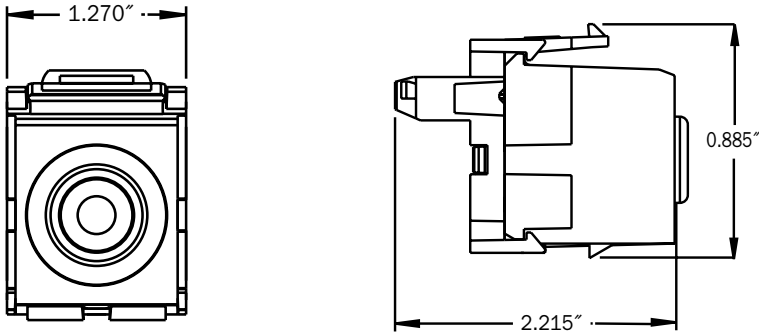

Part Numbers

RCA 110-Type QuickPort Connectors	Part No.
RCA 110-Type QuickPort Connector	40735-R*†
* = Insert color: (O) Orange, (R) Red, (W) White, (Y) Yellow.	
† = Housing color: (I) Ivory, (W) White, (A) Almond, (G) Grey, (E) Black.	

For Applications Engineering Support – Call 1-425-485-4288; in USA call 1-800-722-2082.
Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA# GS-35F-4785G

