



✓ For Retrofit Installation

- = **Individual Dimmer Control (CI)**
- = **5 Preset Scene Dimming System Room Control (CP)**
Maximum 10 Compose™ PLC devices per room
- = **Centralized Multi-Room Control (CM)**
Maximum 16 rooms
- = **Firewall†**
CPLCFW



Ordering Guide

Compose™ PLC Products

DESCRIPTION	ITEM NUMBER	COLOR SUFFIX	WATTAGE CAPACITY	WIRING DIAG. PP. 32-33	NOTES PP. 34-35
INDIVIDUAL ROOM DIMMER					
Inductive*	CI600VAPLC	-W-I	600VA	B	1C
Electronic Non-Dim Switch*	CI1000VAPLC	-W-I	1000VA	B	1C
	CI1000NDPLC	-W-I	1000VA	B	
Remote Multi-Location/3-Way Remote	CPR3	-W-I		BB	
5 PRESET SCENE DIMMERS					
Portable Lamp Module	CP300VALAMP		300VA		
Inductive *	CP600VAPLC	-W-I	600VA	BB	1C
	CP1000VAPLC	-W-I	1000VA	BB	1C
Electronic Non-Dim Switch*	CP1000NDPLC	-W-I	1000W	BB	
Remote Multi-Location/3-Way	CPR3	-W-I		BB	
5 PRESET SCENE DIMMING SYSTEM MASTER CONTROL STATIONS*					
Classic Series 5-Scene Master	CP5PLC	-W-I		BB	
Ellipse® Series 5-Scene Master	CP5ESPLC	-W-I		BB	
CENTRALIZED MULTI-LOCATION MASTER CONTROL STATIONS*					
Classic Series 6-Button Master	CM6BPLC	-W-I		BB	
Classic Series 8-Button Master	CM8BPLC	-W-I		BB	
Ellipse® Series 6-Button Master	CM6BESPLC	-W-I		BB	
Ellipse® Series 8-Button Master	CM8BESPLC	-W-I		BB	
COMPOSE™ PLC OPTIONS					
One Circuit Noise Reducer	CPLCNR1				4A
In-Line Filter	CPLCILF20				
Plug-In Filter	CPLCPIF5		20Amp		
Firewall, 4-Circuit	CPLCFW4		5Amp		
Firewall, 8-Circuit	CPLCFW8		4x20Amp		4A
Surge Protector, 2-Phase	CPLCSP2		8x20Amp		4A
Surge Protector, 3-Phase	CPLCSP3				4B
Signal Analyzer	CPLCSA				4B
CUSTOM ENGRAVING**					
Custom-Engraved 6-Button Ellipse® Series Membrane	CE6BES				
Custom-Engraved 8-Button Ellipse® Series Membrane	CE8BES				
WIRELESS REMOTE					
Hand-held infrared transmitter Ellipse® Series CLMIRTES					



Features:

Individual Dimmer Control (CI)

The perfect solution when you have only 1 or 2 dimmers/switches within a room.

- Each dimmer has an elegant fade to your favorite preset lighting level and off.
- Red LED night light
- Fits standard decorator-style faceplates

5 Preset Scene Dimming System Room Control (CP)

- 5 Programmable lighting scenes
- Up to 10 dimmers/switches/master control stations within a room
- Fade lighting on/off and between preset scenes
- Illuminated preset buttons
- Fits standard decorator-style faceplates


Centralized Multi-Room Control (CM)

- Controls up to 16 different rooms
- Every button is programmable to control Compose™ PLC, CI and CP devices
- For consistent, reliable operation, use with the Lightolier® Controls CPLCFW4/CPLCFW8 (Firewall).

Dimensions:

Master:	Width (W)	Height (H)	Depth (D)
Strap =	2.75"	4.5"	1.2"
Dimmer:	Width (W)	Height (H)	Depth (D)
Strap =	2.75"	4.5"	1.37"


Compose™ PLC Typical Floor Plan Uses existing standard residential wiring

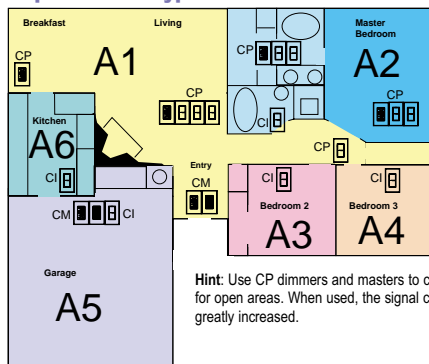

Hint: Use CP dimmers and masters to create elegant lighting scenes for open areas. When used, the signal communication speed is also greatly increased.



Firewall

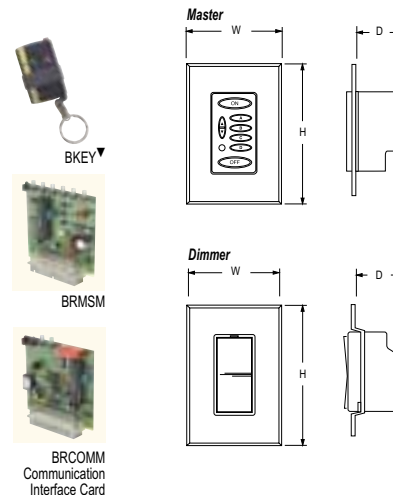

* Shown with Compli Designer Faceplates; sold separately. See pages 28-29. Also fits designer-style faceplates by others.
 ** For more information on custom engraving, see page 31.
 † Neutral connection required.

Color Code
White W
Ivory I