

Features

- Customer operable switches.
- Single and Dual Line versions.
- Wire it once - no rewiring required if service turned back to incumbent.
- Switch is inset to avoid accidental switching.
- Plastic wall and PCB provide added protection from damage to wires and switches during installation.
- Available auxiliary jack, prewired to the "PROVIDER A" screw terminals (NOT controlled by the switch).
- Customizable for your name/logo - Reinforce your brand at the visible point of service.

Specifications

Contact: - - - - -Spring tempered phosphor-bronze 0.018" diameter
50 micro inch hard gold plating minimum
100 micro inch underplate with sulfamate nickel

Terminals: - - - - -Binding Screws


Contact Pressure: - - - - -100 grams minimum

Contact Resistance: - - - - -5 milliohms maximum

Insulation Resistance: - - - - -500 mega ohms minimum

Current/Voltage: - - - - -140 VDC @ 2 amps

cULus listed (pending)

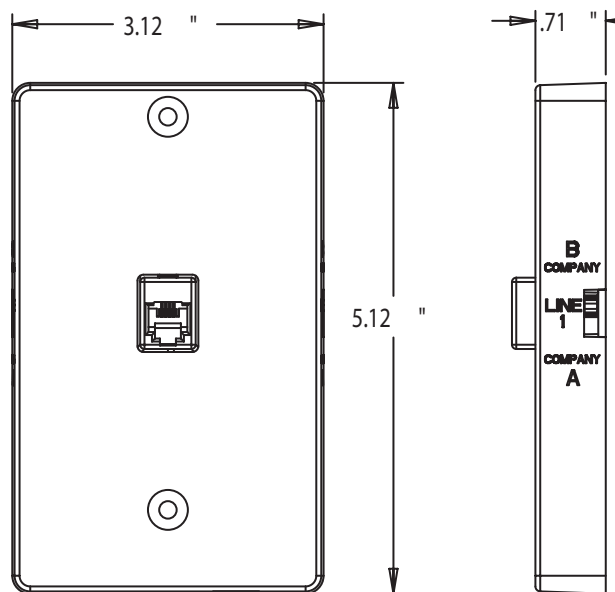

Ordering Information

<u>Product Number</u>	<u>Description</u>
630S1-xx	Single Line Switched
630S2-xx	Dual Line Switched
630S1-12-xx	Single Line Switched with Auxiliary Jack
630S2-12-xx	Dual Line Switched with Auxiliary Jack
Colors (xx):	(52) Electrical Ivory

Specifications subject to change without notice. Copyright 2005. Original: 6/05