


INPUT JACK TYPE "B" (FOR SYSTEMS NOT USING A MASTER)

Terminals are to be wired to corresponding terminals at any room station using a six core cable consisting of twisted pairs.

If the intercom system itself is wired and configured for 6 wire operation, the two jumper pins on the input jack are to be bridged as shown on the diagram below.

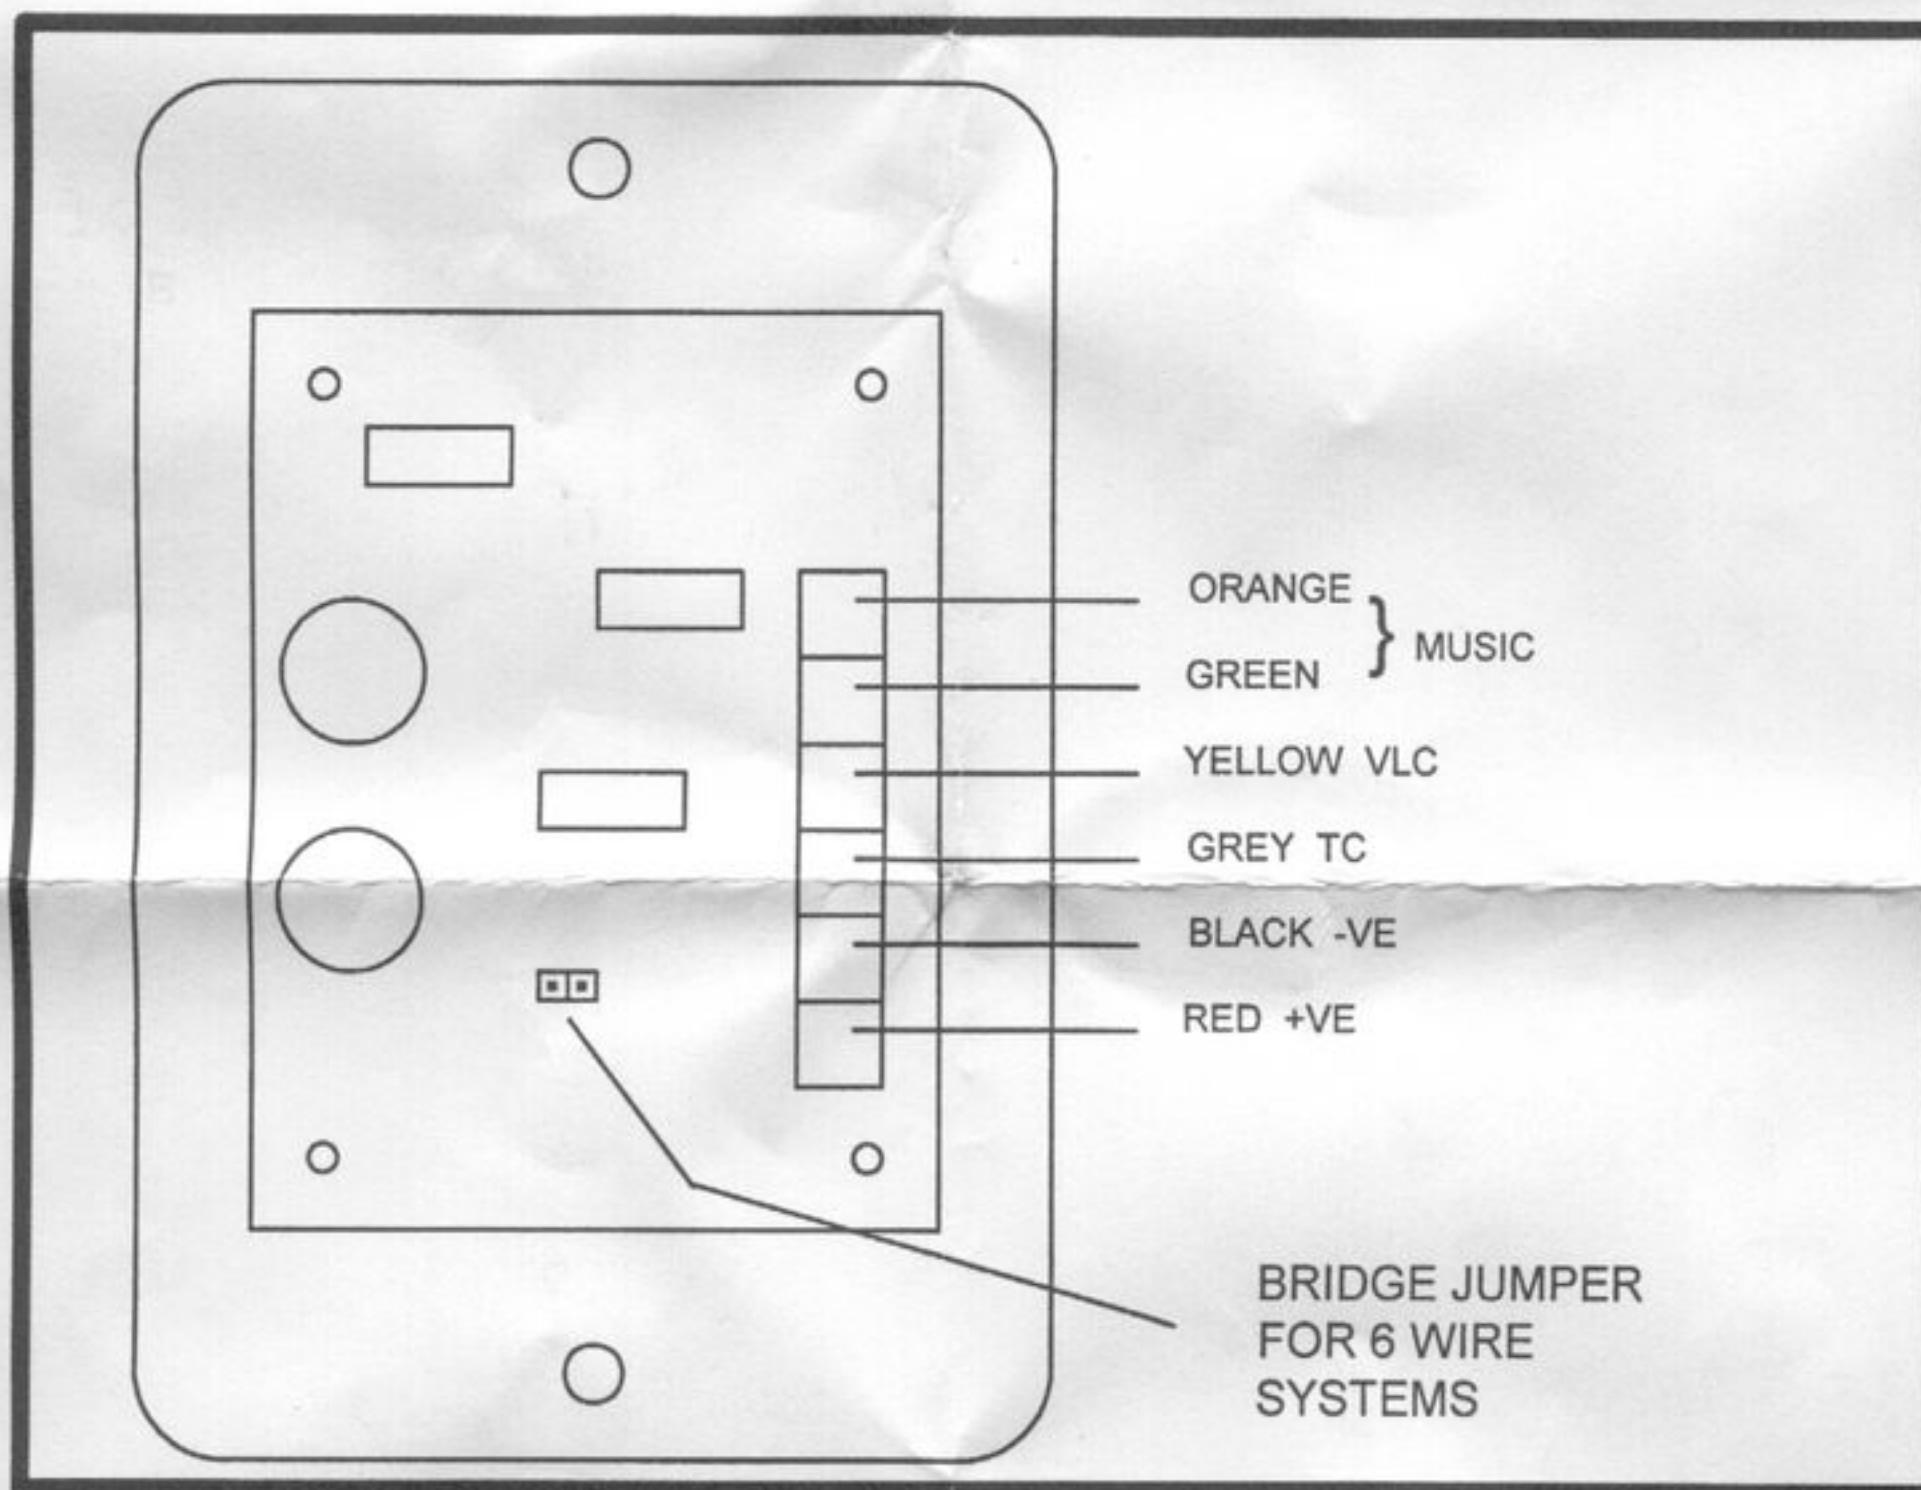

JUMPER OPEN - For 8 wire systems - Allows music to play at rooms not involved in private communication.

JUMPER BRIDGED - For 6 wire systems - Enables music to be muted while chimes or communication is in progress.